


- Clutch to connector bolt holes and spread flange joints
- Designed for zero gap flange joints
- Does not damage to flange surface
- Dual usage recommended for large flanges
- Provide maximum security for flange spread operation
- Suitable for 17.5 mm and 39 mm diameter connection holes.
- Holder grips are available for every bolt diameter.
- Accelerates the flange separation process, reduces costs.
- Service and replacement parts support in Turkey

Mechanical Series (SG-4TM, SG-6TM, SG-11TM)

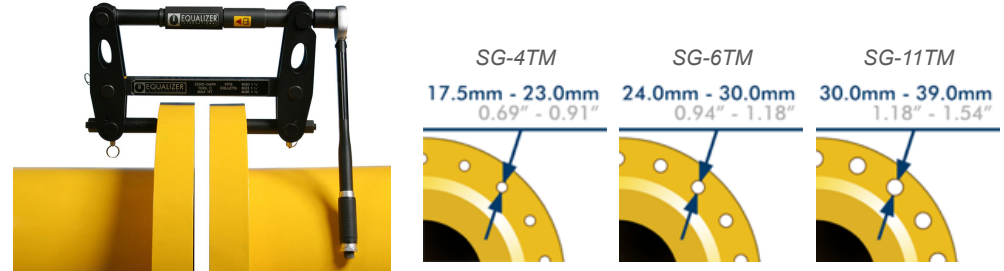

Product Details	Unit	SG-4TM	SG-6TM	SG-11TM
<b>Spread Force</b>	Ton	3.7	6	11
<b>Bolt Hole</b>	Mm	17.5 - 23	24 - 30	30 - 39
<b>Grip Holder</b>	Mm	M16 - M20	M24 - M27	M30 - M33 - M36
<b>Tool Weight</b>	Kg	4.8	7.5	10.5
<b>With Case Weight</b>	Kg	12.8	16	20

Equalizer SG Series grip-holder flange spreaders is used at zero-gap flange joints. Equalizer zero gap grip-holder mechanical flange spreaders are clutch to connector bolt holes and spread flange joints.

