

**SINGLE ACTING, LOW HEIGHT CYLINDERS,
LOAD OR SPRING RETURN**



LARZEP advantages

- Capacity from 10 to 100 Tn, stroke up to 150 mm.
- Two versions: SP for load return, and SMP for spring return.
- Low profile for use in confined spaces: machinery positioning, tool fastening, load tests.
- All models are black nitrated.
- Models from 30 to 100 Tn can mount optional tilting saddle.

Carefully read and understand the safety instructions.




*Coupler inclined 10°

Page. 108

Capacity		Stroke	Model	Model	Oil Cap.	A
Tn	kN	mm	LARZEP	LARZEP	cm ³	mm
10	109	40	SP01004	SMP01004	64	89
20	214	40	SP02004	SMP02004	125	101
30	303	60	SP03006	SMP03006	265	125
50	486	60	SP05006	SMP05006	425	125
100	911	60	SP10006	SMP10006	796	141
		150	SP10015	SMP10015	1.990	254


SINGLE ACTING CYLINDERS



SP
SMP


10-100 Tn.

700 bar

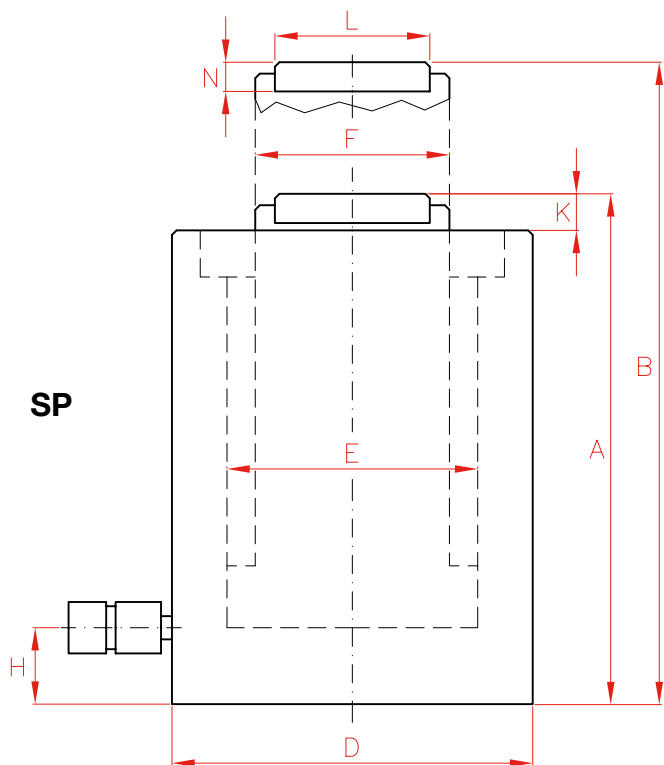

Pump and Cylinder Sets.

Page. 76

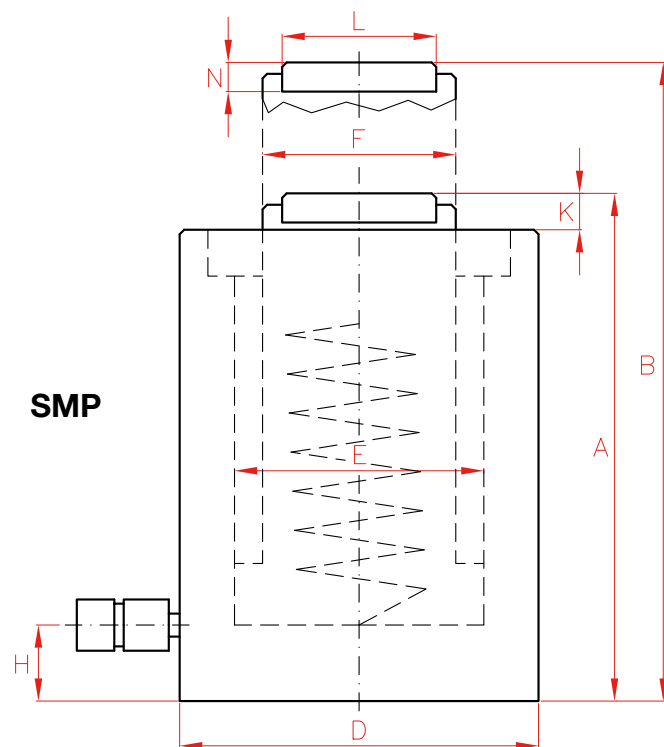

Low Height, Single Acting
Cylinders, High Tonnage,
SPR.

Page. 24



Optional Tilting Saddles.

Page. 112

	B	D	E	F	H	K	L	N	Area	Weight	Model	Model	With tilting saddle	
	mm	mm	mm	mm	mm	mm	mm	mm	cm ²	kg	LARZEP	LARZEP	A	Model
	129	66	45	36	14*	2	-	-	16	3	SP01004	SMP01004	-	-
	141	90	63	56	14*	2	-	-	31	5	SP02004	SMP02004	-	-
	185	102	75	60	14*	2	45	11	44	8	SP03006	SMP03006	150	AZ0401
	185	127	95	80	16*	2	61	12	71	12	SP05006	SMP05006	152	AZ0402
	201	175	130	110	26	2	88	14	133	25	SP10006	SMP10006	174	AZ0404
	404	175	130	110	26	2	88	14	133	43	SP10015	SMP10015	287	AZ0404