



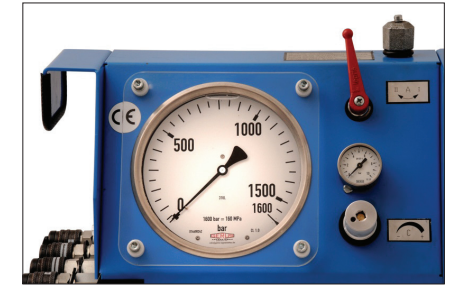


HP25 1500 Bar Hydropneumatic Test Pumps

- Operating pressure up to 1500 bar
- Single speed, single acting, 4 outputs
- 0..1600 bar ø165 precision analog gauge
- Internal security valve for overloading,
- Easy pressure adjustment by air control
- Lightweight due to aluminium material
- Easy and multi-purpose use, silent operation
- 1500 bar hydraulic output with only 7 bar air input
- Lower operating costs & time saving, long life

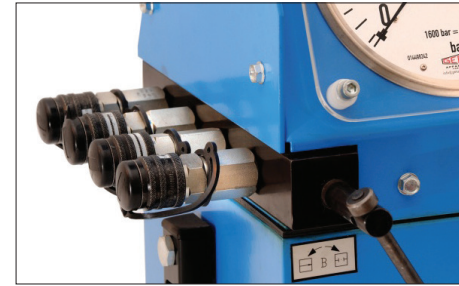

Model	HP-25
Working Pressure	1500 Bar
Oil Tank Capacity	7 ltr
Pump Type	Single Act.
Flow Rate	500 cm ³ /min
Air Requirement (min-max)	1,5 - 7 bar
Air Consumption	at 6 Bar 0,37 dm ³ / min
Air Input Jack	9 mm
Oil Port	4 x ¼" NPT (quick coupling)
Pressure Gauge	0...1.600 bar / ø165mm
Oil Included Weight	30 kg
Sizes (WxLxH)	320 x 430 x 430 mm

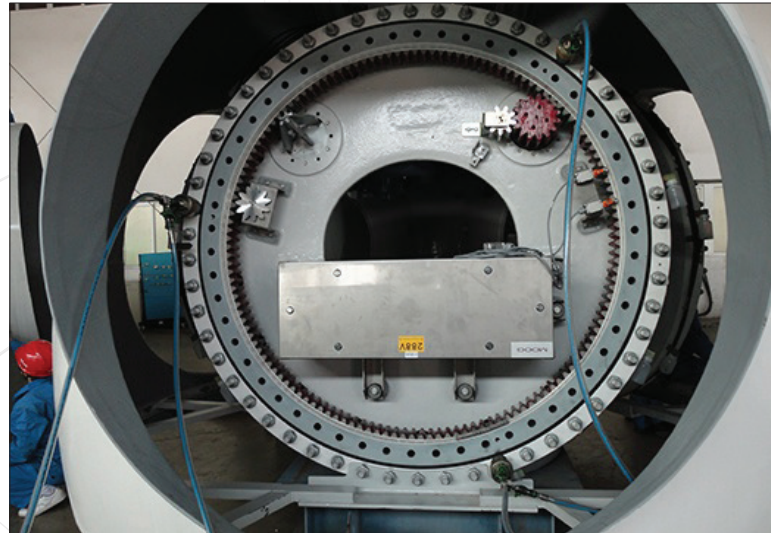

Surkon Makina Sanayi ve Ticaret LTD. ŞTİ.

İvedik Organize Sanayi Bölgesi - Özpetek Sanayi Sitesi 1390 Sokak No: 12 - TR-06378 - Yenimahalle / ANKARA
Tel: +90 (312) 386 14 64 / Faks: +90 (312) 386 14 88 / info@surkon.com / www.surkon.com



ISO 9001:2008
Quality Management System
TS EN ISO / IEC 17021
AB-0049-YS
Certificate No: 57812

SURKON
INTERNATIONAL